


# PosterBOX Mini

Side illumination for shallow or narrow light boxes

## Specifications

- Part number** ..... 701946-6WMLP1
- Dimensions L x W x H** ..... 38 mm x 30 mm x 14 mm  
(1.5 in x 1.2 in x 0.6 in)
- LEDs per module** ..... 1
- Viewing angle** ..... 15 x 40°
- Module spacing** ..... 188 mm (7.4 in) center-to-center
- Operating temperature** ..... -40° C to +60° C
- Protection class** ..... IP66
- Power per module** ..... 1.2 W
- Efficacy** ..... 87 lm/W
- Power capacity** ..... 45 modules per SloanLED 60 W 12 VDC power supply
- Binning** ..... MacAdam Step 3
- Fastening** ..... Peel-n-stick and mechanical
- Packaging** ..... 60 modules per bag, 10 bags per carton
- Color temperatures** ..... 6500 K
- Lumens per module** ..... 104

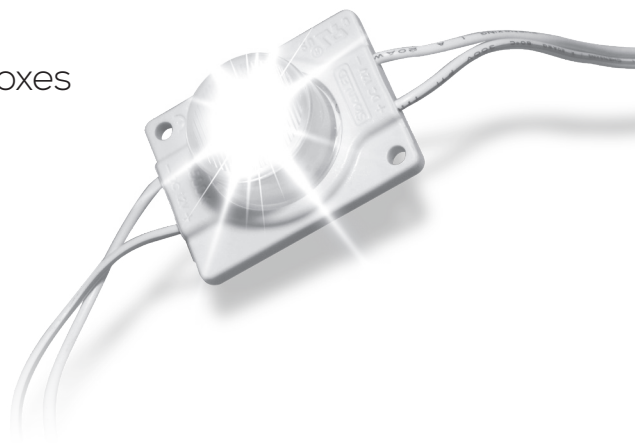

## Power Supply Capacity

12 VDC Power supply*	Maximum modules
<b>Modules per meter/foot</b>	5.31/ 1.62
25 W Power Supply	19
60 W Power Supply	45
120 W Power Supply	2 x 45
Power used per module	1.2 W

\* Configured for Class 2 Output.



PosterBOX™ is licensed under: Patents CN200680037992.9, DE202006020673.6, NL1030161, US6932495, and US7841733; and patent applications EP06812715.8 and NL2000273. Green Signage, PosterBOX™ is a trademark of Lux et Libertas BV. SloanLED, the SLogo, and Leaders in LED Technology are trademarks of Sloan Company, Inc.

**SloanLED Headquarters**  
805.676.3200 • info@SloanLED.com

**SloanLED Europe b.v.**  
+31 88 12 44 900 • Europe@SloanLED.com



SloanLED.com

© 2019 SloanLED Rev F 2019-12-07



Visit product page for details.

Specifications subject to change without notice.

